


Thermocouples

General Applications

Flexible Extensions

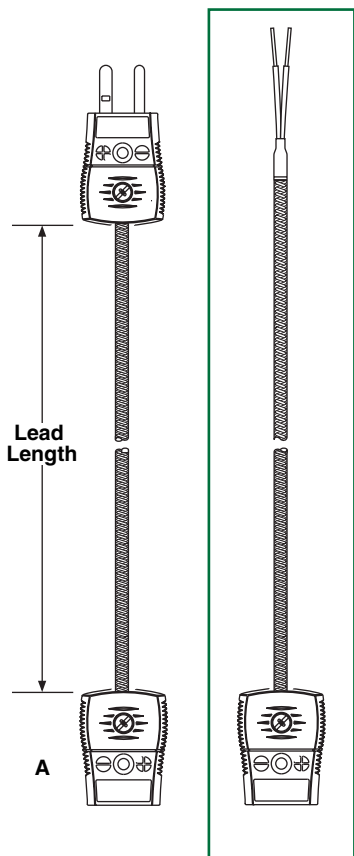

Flexible extensions allow the disconnecting of thermocouples from a system without disturbing the remaining wiring.

Rapid Ship Sensors

Rapid Ship sensors come with standard female connector and a split lead termination.

Calibration	Lead Protection	Lead Length		Part Number
		in.	(mm)	
J	Fiberglass with SS overbraid	48	(1219)	60XJBXE048A
		96	(2438)	60XJBXE096A
	Fiberglass with SS hose	48	(1219)	60XJCXE048A
		96	(2438)	60XJCXE096A
K	Fiberglass with SS overbraid	48	(1219)	60XKBXE048A
		96	(2438)	60XKBXE096A
	Fiberglass with SS hose	48	(1219)	60XKCXE048A
		96	(2438)	60XKCXE096A

Custom Ordering Information—Items in **Bolded Green Type** are preferred with shorter lead times.

1 2 3 4 5 6 7 8 9 10 11
6 0 X X

1-2. Construction Style _____
 60 = Flexible extension

3. Diameter _____
 X = Not applicable

4. Calibration _____
J = Type J T = Type T
K = Type K E = Type E

5. Lead Protection _____
 F = Fiberglass (24 gauge stranded)
 S = Fiberglass with stainless steel overbraid (24 gauge stranded)
 P = Fiberglass (20 gauge stranded)
B = Fiberglass with stainless steel overbraid (20 gauge stranded)
C = Fiberglass with stainless steel hose (20 gauge stranded)
 T = PFA (24 gauge stranded)
 U = PFA with stainless steel overbraid (24 gauge stranded)
 K = PFA with stainless steel hose (24 gauge stranded)
V = PFA (20 gauge stranded)
 W = PFA with stainless steel overbraid (20 gauge stranded)
 Y = PFA with stainless steel hose (20 gauge stranded)

6. Junction _____
 X = Not applicable

7. Termination "A" _____
A = Standard, 2 ½ inch split leads
 B = 2 ½ inch split leads with spade lugs
 C = 2 ½ inch split leads with spade lugs and BX Connector
D = Standard male plug, quick disconnect
E = Standard female jack, quick disconnect
 *F = Miniature male plug, quick disconnect
 *G = Miniature female jack, quick disconnect
 H = ¼ inch push-on connector

8-10. Lead Length (inches) _____
012, 024, 036, 040, 048, 060, 072, 079, 096 and 120
 Available lengths: 006 to 360, over 360 consult factory

11. Termination "B" _____
A = Standard, 2 ½ inch split leads
 B = 2 ½ inch split leads with #6 spade lugs
 C = 2 ½ inch split leads with #6 spade lugs and BX connector
D = Standard male plug, quick disconnect
E = Standard female jack, quick disconnect
 F = Miniature male plug, quick disconnect
 G = Miniature female jack, quick disconnect
 H = ¼ inch push-on connector

* Not available with SS hose.